



Specification-grade wet-location luminaire for wall mount applications.

- Machined 6061-T6 copper-free aluminum. Aluminum components are anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Adjustable LED Module: 3W, 6W, 9W, 12W (15W startup draw)
- CRI = 85
- Available in 2700K, 3000K.
- Remote transformer required.
- Stainless steel hardware.
- Junction box mount design.
- 10" 18ga. Teflon coated wire leads.
- 30° Angled Cap holds 2 lens accessories.
- Three mounting plate options.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.

Mounting Plate Options:




4/0 Round
5" dia.



4/0 Square
5" Square



3/0 Round
4" dia.

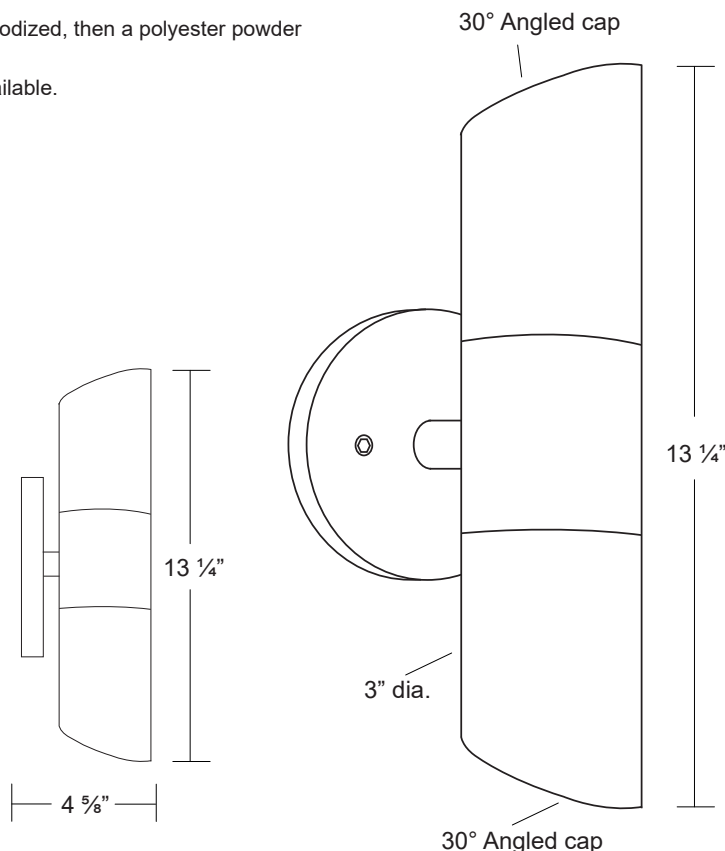

Specifications

MODEL: WA - 35L

LAMPING: 3W - 12W Adjustable LED Module (X2)

MATERIAL: 6061-T6 Aluminum

VOLTAGE: 12VAC/DC

WATTAGE: 3W-12W Adjustable

Ordering Logic:

MODEL	METAL	MOUNTING PLATE		FINISH	
WA - 35L	A - Aluminum	1 - 4/0 Round 3 - 3/0 Round	2 - 4/0 Square	BK - Black BZ - Bronze WT - White BG - Beige	BKT - Black Texture BZT - Bronze Texture SL - Silver CA - Clear Anodized

ORDERING EXAMPLE: WA - 35L - A - 1 - BK - 55/55*

*See Module sheet to select module type to be installed

Excelsior Lighting, Inc.

PROJECT:

TYPE:

12W MULTI-LEVEL - 3W, 6W, 9W, 12W (210-1100 Lumens)



- True equivalent to MR16 20W/35W/50W Halogen (equivalent CBCP)
- 2700K or 3000K
- Equivalent to either 50W, 35W or 20W halogen light output levels
- 10.8-13.2V
- 15W startup draw
- Interchangeable lenses: 15°, 30°, 45°, 60°
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Compatible with low-voltage magnetic transformers
- L70=60,000 hours
- 3 Year warranty
- FCC Compliant
- RoHS Compliant
- Pb Free

#	Specifications	Lumens
50	3W - 12W, 2700K, 15°	240-960
51	3W - 12W, 2700K, 30°	240-960
52	3W - 12W, 2700K, 45°	240-960
60	3W - 12W, 2700K, 60°	240-960
53	3W - 12W, 3000K, 15°	285-1165
54	3W - 12W, 3000K, 30°	285-1165
55	3W - 12W, 3000K, 45°	285-1165
61	3W - 12W, 3000K, 60°	285-1165

Wattage	2700K	3000K
3W	240 lms.	285 lms.
6W	480 lms.	570 lms.
9W	720 lms.	855 lms.
12W	960 lms.	1165 lms.

15°



45°



30°



60°

