


Specification-grade landscape lighting, wet-location luminaire for step lighting or path lighting applications.

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass available in two finishes.
- Remote transformer required.
- Stainless steel hardware.
- GY 6.35 bi pi socket
- Tempered crystalline spread lens.
- 6 feet of 16/2 low voltage cable supplied.
- Mounting hardware not supplied.
- Core drill design for masonry (2 1/2" hole required).
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: Aluminum: 10 Years, Brass: 25 Years.

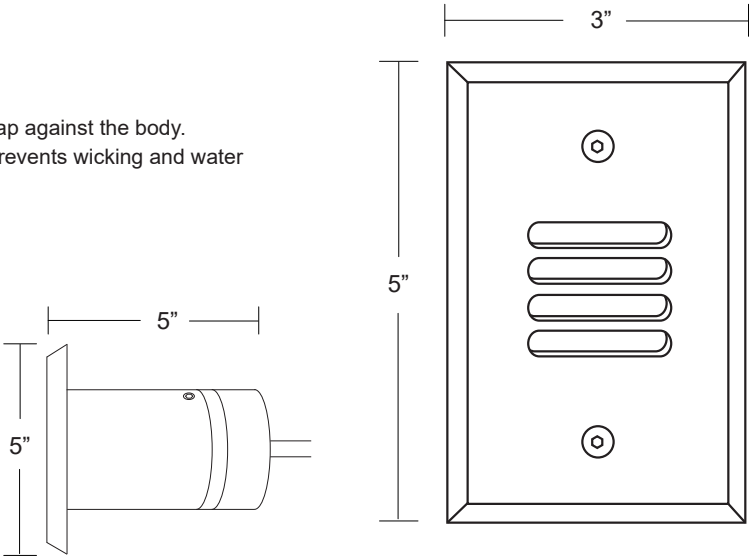

Specifications

MODEL:	ST-2	LAMPING:	MR16 Halogen, 20W Maximum (order separately) 8W LED (order separately)	
MATERIAL:	Aluminum or Brass			
VOLTAGE:	12V	FINISHES:	BK - Black	BKT - Black Texture
			BZ - Bronze	BZT - Bronze Texture
			WT - White	SL - Silver
			BG - Beige	CA - Clear Anodized
			NT - Natural Brass	DB - Dark Brass
WATTAGE:	20 Watt			
SOCKET:	GY 6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.			

Ordering Logic:

MODEL	METAL	FINISH	
ST - 2	A - Aluminum B - Brass	BK - Black	BKT - Black Texture
		BZ - Bronze	BZT - Bronze Texture
		WT - White	SL - Silver
		BG - Beige	CA - Clear Anodized
		NT - Natural Brass	DB - Dark Brass

ORDERING EXAMPLE: ST - 2 - A - BK

Excelsior Lighting, Inc.

PROJECT

TYPE