


Specification-grade direct burial landscape lighting, wet-location luminaire for up lighting applications.

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Remote transformer required.
- GY 6.35 bi pin porcelain socket.
- IP 67 rated.
- Machined louvered top with three 1/2" slots.
- Tempered glass lens.
- Holds 3 lens accessories.
- 6 feet of 16/2 low voltage cable supplied.
- Listed for wet location use.
- Warranty: 10 Years.

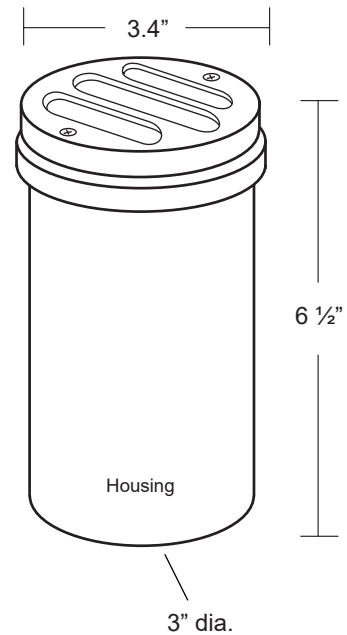

## Specifications:

MODEL:	IN-3	LAMPING:	MR16 Halogen, 35W Maximum (order separately) 8W LED (order separately)	
MATERIAL:	6061-T6 Aluminum			
VOLTAGE:	12V	FINISHES:	BK - Black	BKT - Black Texture
WATTAGE:	35 Watt		BZ - Bronze	BZT - Bronze Texture
			WT - White	SL - Silver
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.		BG - Beige	CA - Clear Anodized

## Ordering Logic:

MODEL	METAL	FINISH	
IN - 3	A - Aluminum	BK - Black BZ - Bronze WT - White BG - Beige	BKT - Black Texture BZT - Bronze Texture SL - Silver CA - Clear Anodized

ORDERING EXAMPLE: IN - 3 - A - BK

Excelsior Lighting, Inc.

PROJECT

TYPE