
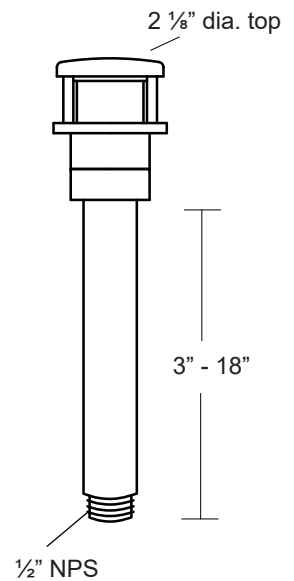


Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Stems lengths of 3" - 18" available. Mount not included.
- Frosted or clear tempered glass lens, glued in.
- 1/2" NPS mount threads (Mount not included.)
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.

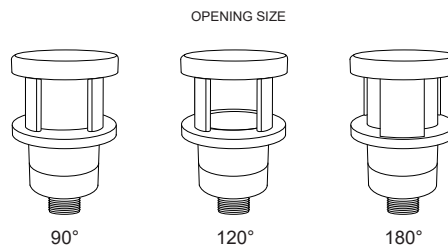

Specifications

MODEL:	PL-5	LAMPING:	T4 Halogen (order separately) 35W Maximum (order separately) 5W LED (order separately)
MATERIAL:	Machined Aluminum		
VOLTAGE:	12V		
WATTAGE:	35 Watt		
SOCKET:	GY 6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.		

Ordering Logic:

MODEL	METAL	STEM LENGTH		LENS STYLE	OPENING SIZE	FINISH	
PL- 5	A - Aluminum	0 - none	9 - 9"	F - Frosted	90 - 90 °	BK - Black	BKT - Black Texture
		3 - 3"	12 - 12"	C - Clear	120 - 120 °	BZ - Bronze	BZT - Bronze Texture
		6 - 6"	18 - 18"		180 - 180 °	WT - White	SL - Silver
						BG - Beige	CA - Clear Anodized

ORDERING EXAMPLE: PL - 5 - A - 12 - F - 90 - BZT

Excelsior Lighting, Inc.

PROJECT

TYPE