


Specification-grade landscape lighting, wet-location luminaire for downlighting applications. Can be utilized for pergola or tree-mounted installations

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Remote transformer required.
- SS Cable and lead wire options.
- Stainless steel hardware.
- 1" brass loop for mounting. Hanging hook included.
- 12" 18 ga. shrink tube covered, black wire leads.
- Two cap styles from which to choose.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.

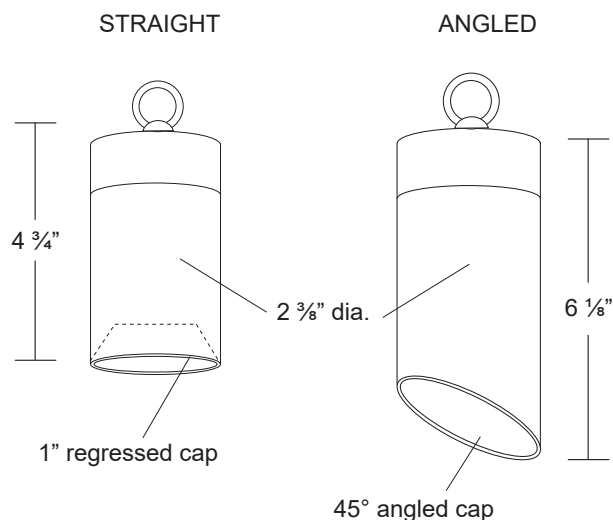

Specifications

MODEL:	RL-1	LAMPING:	MR16 Halogen (order separately) 50W Maximum (order separately) 8W LED (order separately)	
MATERIAL:	6061-T6 Aluminum	FINISHES:	BK - Black	BKT - Black Texture
VOLTAGE:	12V		BZ - Bronze	BZT - Bronze Texture
WATTAGE:	50 Watt		WT - White	SL - Silver
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.		BG - Beige	CA - Clear Anodized

Ordering Logic:

MODEL	METAL	CAP STYLE	SS CABLE	1/2 WIRE	FINISH	
RL - 1	A - Aluminum	S - Straight A - 45° Angle	0 - None 5 - 5 ft 10 - 10 ft 15 - 15 ft 20 - 20 ft 25 - 25 ft 30 - 30 ft	0 - None 5 - 5 ft 10 - 10 ft 15 - 15 ft 20 - 20 ft 25 - 25 ft 30 - 30 ft	BK - Black BZ - Bronze WT - White BG - Beige	BKT - Black Texture BZT - Bronze Texture SL - Silver CA - Clear Anodized

ORDERING EXAMPLE: RL - 1 - A - S - 0 - 0 - BK

Excelsior Lighting, Inc.

PROJECT

TYPE