


Specification-grade direct burial landscape lighting, wet-location luminaire for up lighting applications.

- Cast bronze top & housing.
- Seven standard TGIC powder coat finishes and two bronze finishes.
- Adjustable LED module : 2W, 4W, 6W, 9W. (12W startup draw)
- CRI = 85
- Available in 2700K, 3000K.
- Remote magnetic transformer required.
- Not compatible with electronic transformers.
- IP 68 rated.
- 20 degrees of vertical aiming adjustment.
- Hot-aiming feature is standard.
- 360 degrees of rotational aiming adjustment.
- Tempered glass lens.
- Internal cutoff shield reduces glare on glass.
- Holds 2 lens accessories.
- Pour Collar option available.
- Suitable for drive-over installations.
- 6 feet of 12/2 low voltage cable supplied or 1/2" npsf (2x).
- Listed for wet location use.
- Remote transformer required.
- Warranty: 25 Years.

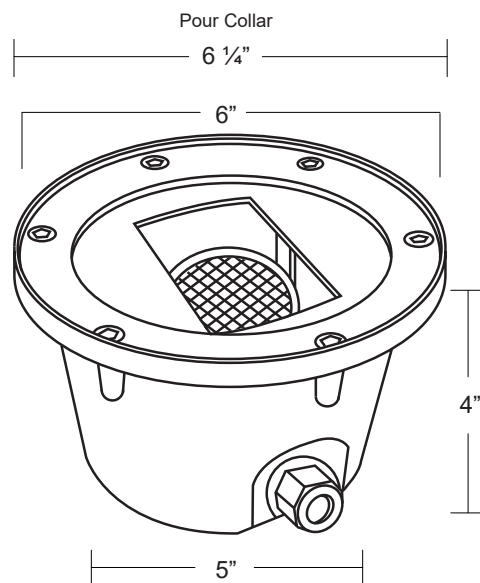

Specifications:

MODEL: IN - 6L

MATERIAL: Cast Bronze

VOLTAGE: 12VAC/DC

WATTAGE: 2W, 4W, 6W, 9W

SOCKET: GY 6.35 Bi-pin porcelain socket rated 600V
250°C 18 ga, Teflon® coated leads.

LAMPING: 9W LED Module (12W startup draw)

Wattage	2700K	3000K
2W	165 lms.	190 lms.
4W	345 lms.	360 lms.
6W	515 lms.	530 lms.
9W	720 lms.	800 lms.

Ordering Logic:

MODEL	METAL	ACCESSORY	POUR COLLAR	WIRE ENTRY	FINISH
IN - 6L	B - Bronze	0 - None AH - Accessory Holder	0 - None PC - Pour Collar	1 - 6 ft 12/2 Cable 2 - Single Conduit 3 - Dual Conduit	BK - Black BZ - Bronze WT - White BG - Beige NT - Natural BKT - Black Texture BZT - Bronze Texture SL - Silver DB - Dark Bronze

ORDERING EXAMPLE: IN - 6L - B - 0 - PC - 1 - BK - 52*

*See Page 2 to select module type to be installed

Excelsior Lighting, Inc.

PROJECT

TYPE

9W MULTI-LEVEL - 2W, 4W, 6W, 9W (165-800 Lumens)



- Equivalent to MR16 20W/35W/50W/75W Halogen (equivalent CBCP)
- Four light levels, 2700K or 3000K
- 12VAC/DC
- 12W startup draw
- Interchangeable lenses: 15°, 30°, 45°, 60°
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Compatible with low-voltage magnetic transformers
- L70=60,000 hours
- 5 Year warranty
- FCC Compliant
- RoHS Compliant
- Pb Free
- Field Replaceable

#	Specifications	Lumens
50	2W - 9W, 2700K, 15°	165-720
51	2W - 9W, 2700K, 30°	165-720
52	2W - 9W, 2700K, 45°	165-720
53	2W - 9W, 3000K, 15°	190-800
54	2W - 9W, 3000K, 30°	190-800
55	2W - 9W, 3000K, 45°	190-800

Wattage	2700K	3000K
2W	165 lms.	190 lms.
4W	345 lms.	360 lms.
6W	515 lms.	530 lms.
9W	720 lms.	800 lms.

LENSES INCLUDED

15°



45°



30°



60°

