


Specification-grade landscape lighting, wet-location luminaire for up lighting or down lighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Adjustable LED Module: 2W, 4W, 6W, 9W. ( 12W startup draw )
- CRI = 85
- Available in 2700K, 3000K, 4000K.
- Remote magnetic transformer required.
- Not compatible with electronic transformers.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- 1/2" NPS Mount Threads (Mount not included).
- Tempered clear glass lens.
- 1/2" regressed lens cap holds 2 lens accessories.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.

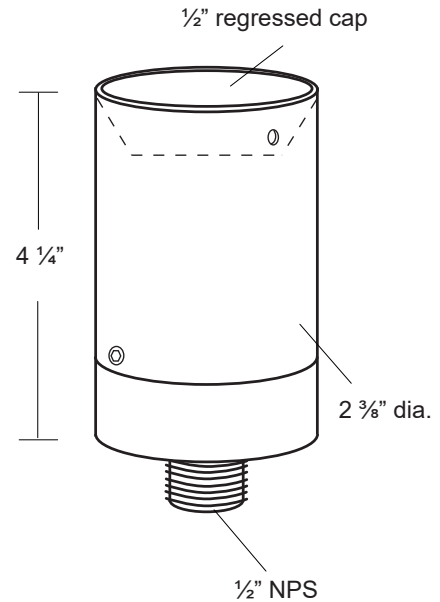

## Specifications

|           |                                                                                 |
|-----------|---------------------------------------------------------------------------------|
| MODEL:    | UL-5L                                                                           |
| MATERIAL: | 6061-T6 Aluminum                                                                |
| VOLTAGE:  | 12VAC/DC                                                                        |
| WATTAGE:  | 2W, 4W, 6W, 9W                                                                  |
| SOCKET:   | GY 6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon ® coated leads. |

LAMPING: 9W LED Module ( 12W startup draw )

| Wattage | 2700k    | 3000K    | 4000K   |
|---------|----------|----------|---------|
| 2W      | 165 lms  | 190 lms  | 210 lms |
| 4W      | 345 lms. | 360 lms. | 385 lms |
| 6W      | 515 lms. | 530 lms. | 590 lms |
| 9W      | 720 lms. | 800 lms. | 860 lms |

## Ordering Logic:

| MODEL   | METAL        | FINISH                                                | MODULE                                                                            |
|---------|--------------|-------------------------------------------------------|-----------------------------------------------------------------------------------|
| UL - 5L | A - Aluminum | BK - Black<br>BZ - Bronze<br>WT - White<br>BG - Beige | BKT - Black Texture<br>BZT - Bronze Texture<br>SL - Silver<br>CA - Clear Anodized |
|         |              |                                                       | See Page 2                                                                        |

ORDERING EXAMPLE: UL - 5L - A - BK - 52\*


\*See Module sheet to select module type to be installed

Excelsior Lighting, Inc.

PROJECT

TYPE

9W MULTI-LEVEL - 2W, 4W, 6W, 9W (165-860 Lumens)



- Equivalent to MR16 20W/35W/50W/75W Halogen (equivalent CBCP)
- Four light levels, 2700K, 3000K, or 4000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangeable lenses: 15°, 30°, 45°, 60°
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Compatible with low-voltage magnetic transformers
- L70=60,000 hours
- 5 Year warranty
- FCC Compliant
- RoHS Compliant
- Pb Free
- Field Replaceable

| #  | Specifications      | Lumens  |
|----|---------------------|---------|
| 50 | 2W - 9W, 2700K, 15° | 165-720 |
| 51 | 2W - 9W, 2700K, 30° | 165-720 |
| 52 | 2W - 9W, 2700K, 45° | 165-720 |
| 60 | 2W - 9W, 2700K, 60° | 165-720 |
| 53 | 2W - 9W, 3000K, 15° | 190-800 |
| 54 | 2W - 9W, 3000K, 30° | 190-800 |
| 55 | 2W - 9W, 3000K, 45° | 190-800 |
| 61 | 2W - 9W, 3000K, 60° | 190-800 |
| 62 | 2W - 9W, 4000K, 15° | 210-860 |
| 63 | 2W - 9W, 4000K, 30° | 210-860 |
| 64 | 2W - 9W, 4000K, 45° | 210-860 |
| 65 | 2W - 9W, 4000K, 60° | 210-860 |

| Wattage | 2700k    | 3000K    | 4000K   |
|---------|----------|----------|---------|
| 2W      | 165 lms  | 190 lms  | 210 lms |
| 4W      | 345 lms. | 360 lms. | 385 lms |
| 6W      | 515 lms. | 530 lms. | 590 lms |
| 9W      | 720 lms. | 800 lms. | 860 lms |

## LENSES INCLUDED

15°



45°



30°



60°

