



Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass or copper, available in two finishes.
- Remote transformer required.
- Stainless steel hardware. 6 feet of 16/2 low voltage cable supplied.
- Shade diameter of 6 1/8".
- Stems lengths of 6" - 36" available. Mount not included.
- Frosted or clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.

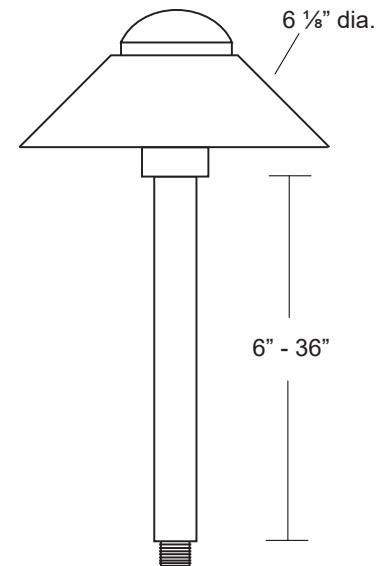

Shade Top Styles

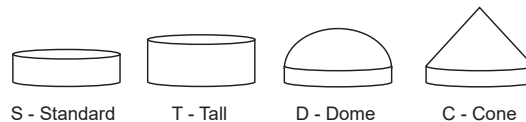

Specifications

MODEL:	PL-3	LAMPING:	T4 Halogen, 35W Maximum (order separately) 5W LED (order separately)	
MATERIAL:	Machined Aluminum, Brass or Copper			
VOLTAGE:	12V	FINISHES:	BK - Black	BKT - Black Texture
WATTAGE:	35 Watt		BZ - Bronze	BZT - Bronze Texture
			WT - White	SL - Silver
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.		BG - Beige	CA - Clear Anodized

Ordering Logic:

MODEL	METAL	LENS STYLE	SHADE TOP	STEM LENGTH		FINISH	
PL - 3	A - Aluminum	F - Frosted	S - Standard	6 - 6"	18 - 18"	BK - Black	BKT - Black Texture
	B - Brass	C - Clear	T - Tall	9 - 9"	24 - 24"	BZ - Bronze	BZT - Bronze Texture
	C - Copper Shade		D - Dome	12 - 12"	30 - 30"	WT - White	SL - Silver
			C - Cone	36 - 36"		BG - Beige	CA - Clear Anodized
						NT - Natural	DB - Dark Bronze

ORDERING EXAMPLE: PL - 3 - A - F - D - 12 - BZT

Excelsior Lighting, Inc.

PROJECT

TYPE