
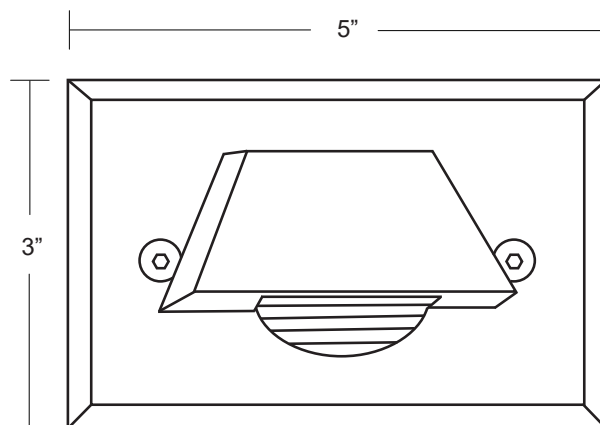


Specification-grade landscape lighting, wet-location luminaire for step lighting or path lighting applications.

- Machined aluminum, available in seven standard TGIC powder coat finishes and clear anodized finish.
- Machined brass available in two finishes.
- Remote transformer required.
- Stainless steel hardware.
- GY 6.35 bi pin socket
- Tempered linear spread lens.
- Single gang junction box design.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years, Brass 25 years

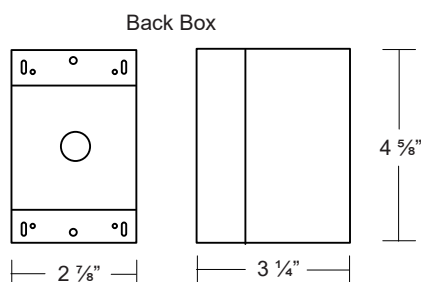

Specifications

MODEL:	ST-11	LAMPING:	MR16 Halogen, 20W Maximum (order separately) 8W LED (order separately)	
MATERIAL:	Aluminum or Brass	FINISHES:	BK - Black	BKT - Black Texture
VOLTAGE:	12V		BZ - Bronze	BZT - Bronze Texture
WATTAGE:	20 Watt		WT - White	SL - Silver
SOCKET:	GY 6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.		BG - Beige	CA - Clear Anodized
			NT - Natural Brass	DB - Dark Brass

Ordering Logic:

MODEL	METAL	FINISH	
ST - 11	A - Aluminum B - Brass	BK - Black BZ - Bronze WT - White BG - Beige NT - Natural Brass	BKT - Black Texture BZT - Bronze Texture SL - Silver CA - Clear Anodized DB - Dark Brass

ORDERING EXAMPLE: ST - 11 - A - BK

Excelsior Lighting, Inc.

PROJECT

TYPE