
- Hinged lockable cover and up to five 1/2" and 3/4" knockouts bottom and side entry.
- 300W, 600W, 900W and 1200W sizes.
- · Circuit breaker for each 300W circuit.
- Multi-tap outputs of 11V thru 15V.
- · 6 foot outdoor cord included.
- 120V is standard, 240V or 277V available.
- Stainless steel enclosure, NEMA 3R.
- · For wall mount applications.
- UL and cUL listed for landscape lighting use.
- Timer and photocell optional.





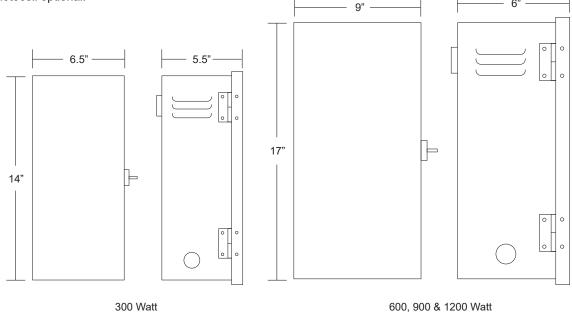

Ordering Logic:

MODEL	WATTAGE	VOLTAGE	OPTIONS
TR - 1	300 - 300 Watts 600 - 600 Watts 900 - 900 Watts 1200 - 1200 Watts	120 - 120 Volts 240 - 240 Volts 277 - 277 Volts	0 - None T - 24-hour Removable TImer P - Built in Photocell TP - 24-hour Removable Timer & Built in Photocell

ORDERING EXAMPLE: TR - 1 - 300 - 120 - T

Excelsior Lighting, Inc.

PROJECT

TYPE