


- Hinged lockable cover and up to four knockouts for 3/8" screw cable connectors - bottom and side entry
- 40W, 60W, 75W and 150W sizes
- Circuit breaker protected
- Multi-tap outputs of 12V thru 15V
- 6 foot outdoor cord included
- 120V 60Hz, Dimmable
- Stainless steel enclosure, NEMA 3R
- ETL and CETL listed for landscape
- Timer and photocell optional

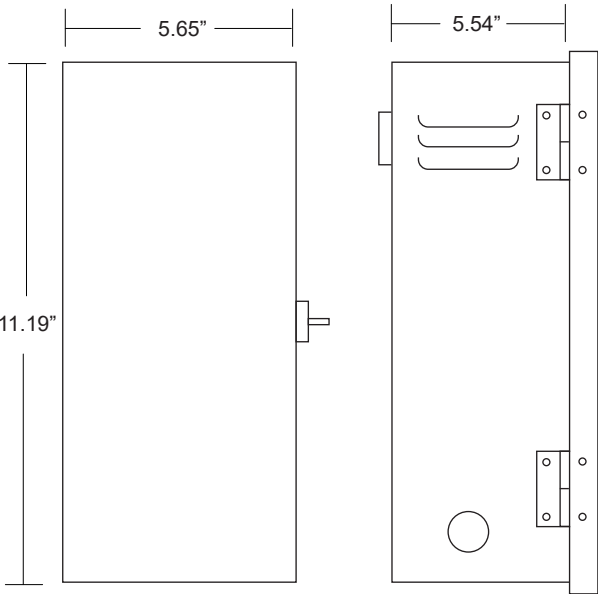

Ordering Logic:

MODEL	WATTAGE	VOLTAGE	OPTIONS
TR - 20	40 - 40 Watts 60 - 60 Watts 75 - 75 Watts 150 - 150 Watts	120 - 120 Volts	0 - None T - 24-hour Removable Timer P - Built in Photocell TP - 24-hour Removable Timer & Built in Photocell

ORDERING EXAMPLE: TR - 20 - 40 - 120 - T

Excelsior Lighting, Inc.	PROJECT
	TYPE