


Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

- Extruded bronze and machined brass.
- Available in natural or dark bronze finishes.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 16/2 low voltage cable supplied.
- Available in 12" or 20" height. Mount not included.
- Frosted tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Listed for wet location use.
- Warranty: 25 Years.

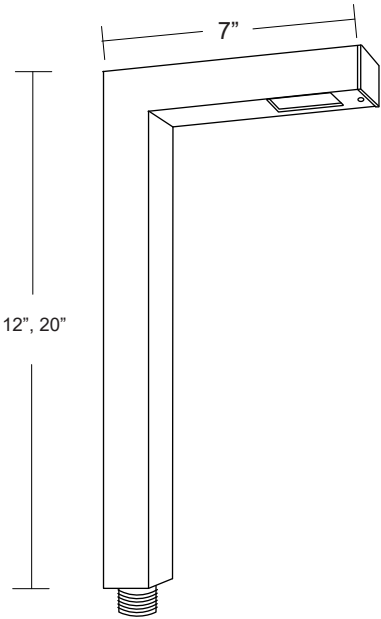

Specifications

MODEL:	PL-10	LAMPING:	T4 Halogen, 35W Maximum (order separately) 2.5W LED (order separately)	
MATERIAL:	Extruded bronze & machined brass			
VOLTAGE:	12V			
WATTAGE:	35 Watt	FINISHES:	NT - Natural	DB - Dark Bronze
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.			

Ordering Logic:

MODEL	METAL	STEM LENGTH		FINISH	
PL - 10	B - Bronze	12 - 12"	20 - 20"	NT - Natural	DB - Dark Bronze

ORDERING EXAMPLE: PL - 10 - B - 12 - NT

Excelsior Lighting, Inc.

PROJECT

TYPE