


FLOOD/ACCENT LIGHT 12VAC/DC 12W LED MODULE MODEL F-3

Wet-location luminaire for uplighting or downlighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

- Cast brass material in Aged Brass finish.
- Two LED modules available with adjustable light levels.
- Available in 2700K, 3000K.
- Remote magnetic transformer required.
- Not compatible with electronic transformers.
- Stainless steel hardware.
- 8ft. 18/2 direct burial wire.
- Four beam patterns include 15°, 30°, 45° and 60°.
- Adjustable glare shield.
- Holds 2 lens accessories.
- Tempered clear glass lens with "self-cleaning" cap.
- Serrated locking knuckle. – 1/2" NPS
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Listed for wet location use.
- Warranty: 5 Years.

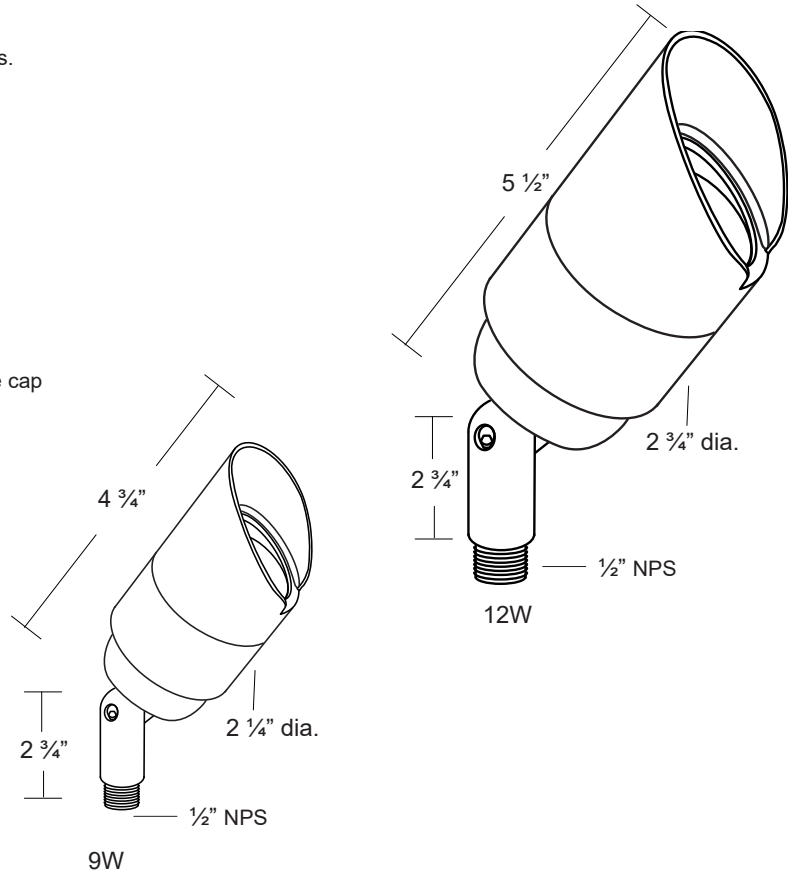

Specifications

MODEL:	F - 3	LAMPING:	2W-9W Adjustable LED Module 3W-12W Adjustable LED Module
MATERIAL:	Cast Brass		
VOLTAGE:	12VAC/DC		
WATTAGE:	2W - 12W Adjustable		

Ordering Logic:

MODEL	METAL	WATTAGE	KELVIN	BEAM	
F - 3	B - Brass	0 - No Module 2 - 2W-9W (190-800 lms) 3 - 3W-12W (210-1100 lms)	0 - None 27 - 2700K 30 - 3000K	0 - None 15 - 15° 30 - 30°	45 - 45° 60 - 60°


ORDERING EXAMPLE: F - 3 - B - 2 - 27 - 15

Excelsior Lighting, Inc.

PROJECT

TYPE

9W MULTI-LEVEL - 2W, 4W, 6W, 9W (110-780 Lumens)

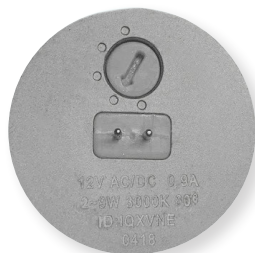

- Equivalent to MR16 10W/20W/35W Halogen (equivalent CBCP)
- 2700K or 3000K
- 10.8-13.2V
- 12W startup draw
- Interchangeable lenses: 15°, 30°, 45°, 60°
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Compatible with low-voltage magnetic transformers
- L70=60,000 hours
- 5 Year warranty
- FCC Compliant
- RoHS Compliant
- Pb Free
- Field Replaceable

Wattage	2700K	3000K
2W	165 lms.	190 lms.
4W	345 lms.	360 lms.
6W	515 lms.	530 lms.
9W	720 lms.	800 lms.

LENSES INCLUDED

15°



30°



12W MULTI-LEVEL - 3W, 6W, 9W, 12W (210-1100 Lumens)



- True equivalent to MR16 20W/35W/50W Halogen (equivalent CBCP)
- 2700K or 3000K
- Equivalent to either 50W, 35W or 20W halogen light output levels
- 10.8-13.2V
- 15W startup draw
- Interchangeable lenses: 15°, 30°, 45°, 60°
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Compatible with low-voltage magnetic transformers
- L70=60,000 hours
- 5 Year warranty
- FCC Compliant
- RoHS Compliant
- Pb Free
- Field Replaceable

Wattage	2700K	3000K
3W	240 lms.	285 lms.
6W	480 lms.	570 lms.
9W	720 lms.	855 lms.
12W	960 lms.	1165 lms.

45°



60°

