



Specification-grade wet-location luminaire for sign lighting applications.


- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Adjustable LED module : 2W, 4W, 6W, 9W. (12W startup draw)
- CRI = 85
- Available in 2700K, 3000K.
- Remote magnetic transformer required.
- Not compatible with electronic transformers.
- Stainless steel hardware.
- Flush cap for wide distribution holds 2 lens accessories.
- Tempered clear glass glued in.
- Available lengths: 12", 18", 24", 30", 36", 42" or 48"
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.

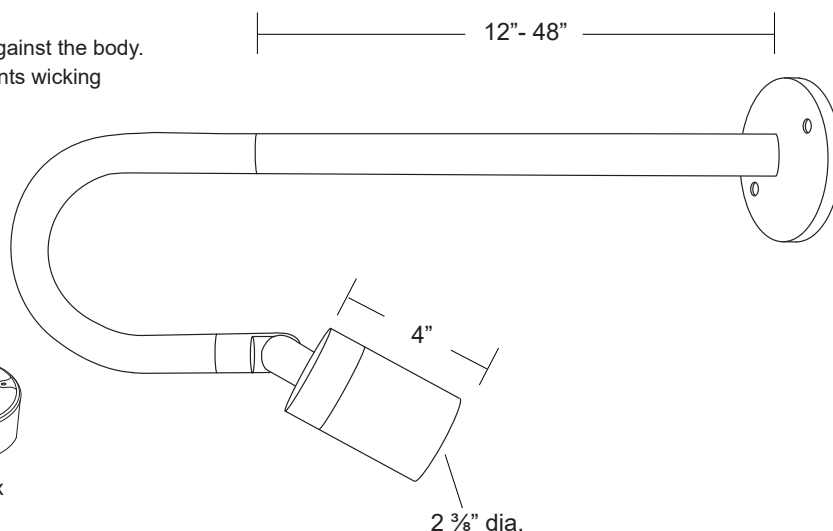


Mounting Plate Options:




4/0 Round
5" dia.



4/0 Square
5" square



3/0 Round
4" dia.



4/0 Box
5" dia.



Made in USA



US



US LISTED

Specifications

MODEL:	SI-10L
MATERIAL:	6061-T6 Aluminum
VOLTAGE:	12VAC/DC
WATTAGE:	2W, 4W, 6W, 9W
SOCKET:	GY 6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon ® coated leads

LAMPING: 9W LED Module (12W startup draw)

Wattage	2700K	3000K
2W	165 lms.	190 lms.
4W	345 lms.	360 lms.
6W	515 lms.	530 lms.
9W	720 lms.	800 lms.

Ordering Logic:

MODEL	METAL	MOUNTING PLATE	STEM LENGTH	FINISH
SI - 10L	A - Aluminum	1 - 4/0 Round	12 - 12"	36 - 36"
		2 - 4/0 Square	18 - 18"	42 - 42"
		3 - 3/0 Round	24 - 24"	48 - 48"
		4 - 4/0 Round	30 - 30"	
				BK - Black BKT - Black Texture
				BZ - Bronze BZT - Bronze Texture
				WT - White SL - Silver
				BG - Beige CA - Clear Anodized

ORDERING EXAMPLE: SI - 10L - A - 1 - 24 - BK - 52*


*See page 2 to select module type to be installed

Excelsior Lighting, Inc.

PROJECT

TYPE

9W MULTI-LEVEL - 2W, 4W, 6W, 9W (165-800 Lumens)



- Equivalent to MR16 20W/35W/50W/75W Halogen (equivalent CBCP)
- Four light levels, 2700K or 3000K
- 12VAC/DC
- 12W startup draw
- Interchangeable lenses: 15°, 30°, 45°, 60°
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Compatible with low-voltage magnetic transformers
- L70=60,000 hours
- 5 Year warranty
- FCC Compliant
- RoHS Compliant
- Pb Free
- Field Replaceable

#	Specifications	Lumens
50	2W - 9W, 2700K, 15°	165-720
51	2W - 9W, 2700K, 30°	165-720
52	2W - 9W, 2700K, 45°	165-720
53	2W - 9W, 3000K, 15°	190-800
54	2W - 9W, 3000K, 30°	190-800
55	2W - 9W, 3000K, 45°	190-800

Wattage	2700K	3000K
2W	165 lms.	190 lms.
4W	345 lms.	360 lms.
6W	515 lms.	530 lms.
9W	720 lms.	800 lms.

LENSES INCLUDED

15°



45°



30°



60°

