


Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Tempered frosted glass lens.
- Stems lengths of 6"- 36" available. Mount not included.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.

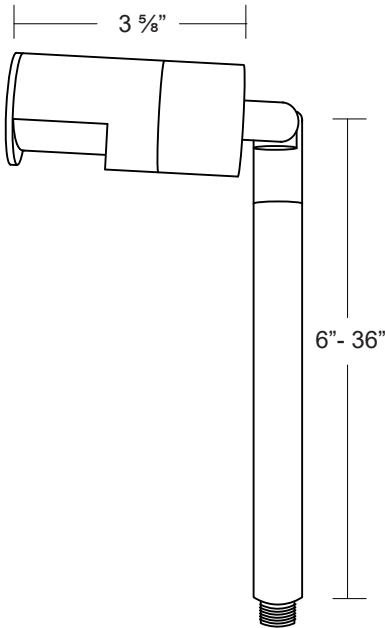

Specifications:

MODEL:	PL-18	LAMPING:	T3 Halogen, 20W Maximum (order separately) 2W LED (order separately)
MATERIAL:	6061-T6 Aluminum		
VOLTAGE:	12V		
WATTAGE:	20 Watt		
SOCKET:	G4 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.		

Ordering Logic:

MODEL	METAL	VERTICAL STEM		FINISH	
PL - 18	A - Aluminum	6 - 6"	24 - 24"	BK - Black	BKT - Black Texture
		9 - 9"	30 - 30"	BZ - Bronze	BZT - Bronze Texture
		12 - 12"	36 - 36"	WT - White	SL - Silver
		18 - 18"		BG - Beige	CA - Clear Anodized

ORDERING EXAMPLE: PL - 18 - A - 12 - BZT

Excelsior Lighting, Inc.

PROJECT

TYPE