


Specification-grade wet-location luminaire for wall mount applications.

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Stainless steel hardware.
- Junction box mount design.
- 10" 18ga. Teflon coated wire leads.
- 1" regressed lens cap holds 2 lens accessories.
- Three mounting plate options.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Listed for wet location use.
- Warranty: 10 Years.

Mounting Plate Options:





4/0 Round
5" dia.



4/0 Square
5" Square



3/0 Round
4" dia.

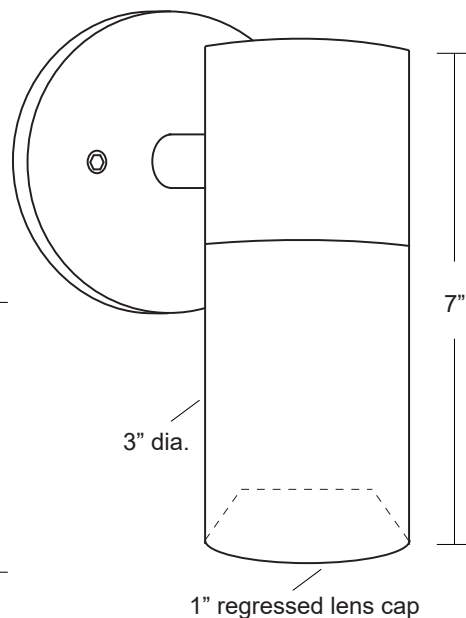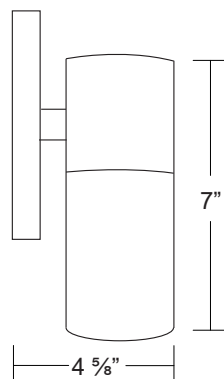

Specifications

MODEL: WA - 24

MATERIAL: 6061-T6 Aluminum

VOLTAGE: 120V

WATTAGE: 50 Watt

SOCKET: GU 10 porcelain socket rated 600V, 250°C
18 ga, Teflon® coated leads.

LAMPING: MR16 Halogen,
50W Maximum (order separately)
8W LED (order separately)

FINISHES: BK - Black BKT - Black Texture
BZ - Bronze BZT - Bronze Texture
WT - White SL - Silver
BG - Beige CA - Clear Anodized

Ordering Logic:

MODEL	METAL	MOUNTING PLATE		FINISH	
WA - 24	A - Aluminum	1 - 4/0 Round 3 - 3/0 Round	2 - 4/0 Square	BK - Black BZ - Bronze WT - White BG - Beige	BKT - Black Texture BZT - Bronze Texture SL - Silver CA - Clear Anodized

ORDERING EXAMPLE: WA - 24 - A - 1 - BK

Excelsior Lighting, Inc.

PROJECT:

TYPE: