


Specification-grade landscape lighting, wet-location luminaire for downlighting applications.

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Integral LED: 4W, 7W, 10W.
- Available in 2700K, 3000K.
- Remote transformer required.
- Stainless steel hardware.
- 12" 18ga. Teflon coated wire leads.
- Cap holds 2 lens accessories.
- Mounting hardware not supplied.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.

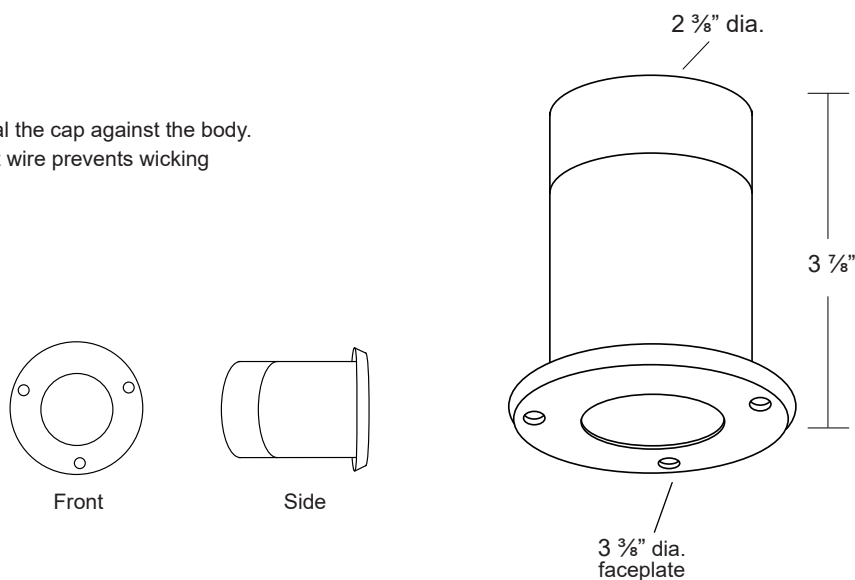

Specifications

MODEL:	DL - 1L	LAMPING:	10W Integral LED Module	
MATERIAL:	6061-T6 Aluminum	FINISHES:	BK - Black	BKT - Black Texture
VOLTAGE:	10.8-13.2V		BZ - Bronze	BZT - Bronze Texture
			WT - White	SL - Silver
WATTAGE:	4W, 7W, 10W		BG - Beige	CA - Clear Anodized

Ordering Logic:

MODEL	METAL	FINISH	
DL - 1L	A - Aluminum	BK - Black	BKT - Black Texture
		BZ - Bronze	BZT - Bronze Texture
		WT - White	SL - Silver
		BG - Beige	CA - Clear Anodized

ORDERING EXAMPLE: DL - 1L - A - BK - 52*

*See Module sheet to select module type to be installed

Excelsior Lighting, Inc.

PROJECT

TYPE

MULTI-LEVEL - 4W, 7W, 10W



- True equivalent to MR16 20W/35W/50W Halogen (equivalent CBCP)
- Replicates either 50W, 35W or 20W halogen light output levels
- 10.8-13.2V
- 15W startup draw
- Interchangeable lenses: 12°, 25°, 40°
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Dimmable to 5% with standard low-voltage phase dimmers
- Compatible with low-voltage magnetic & electronic transformers
- L70=60,000 hours
- 5 Year warranty
- FCC Compliant
- RoHS Compliant
- Pb Free
- Compatible with B+L Model EX95101 electronic transformer (order separately)
- Compatible with Lutron dimmer models:
 - Diva DELV-300/303P
 - Maestro MAELV-600
 - Skylark SELV 300PH

NO.	Specifications	Lumens
50	4W/7W/10W, 2700K, 12°	342/494/635
51	4W/7W/10W, 2700K, 25°	342/494/635
52	4W/7W/10W, 2700K, 40°	342/494/635
53	4W/7W/10W, 3000K, 12°	351/533/705
54	4W/7W/10W, 3000K, 25°	351/533/705
55	4W/7W/10W, 3000K, 40°	351/533/705