


Specification-grade LED lighting, wet-location luminaire for uplighting or downlighting applications. Can be utilized for tree mounted or surface mounted installations.

- 60 Watts
- 8,400 Lumens
- 100-277 VAC
- Seoul LED
- Beam: 120 degree without shielding
- 4000K, 4500K or 5000K
- Cold forged Aluminum
- Stainless steel hardware
- Clear Acrylic lens
- Ring or Bracket mounting
- Wet location IP65
- ETL Certification
- Dimensions: 8" dia. x 3" overall
- Warranty: 6 Years

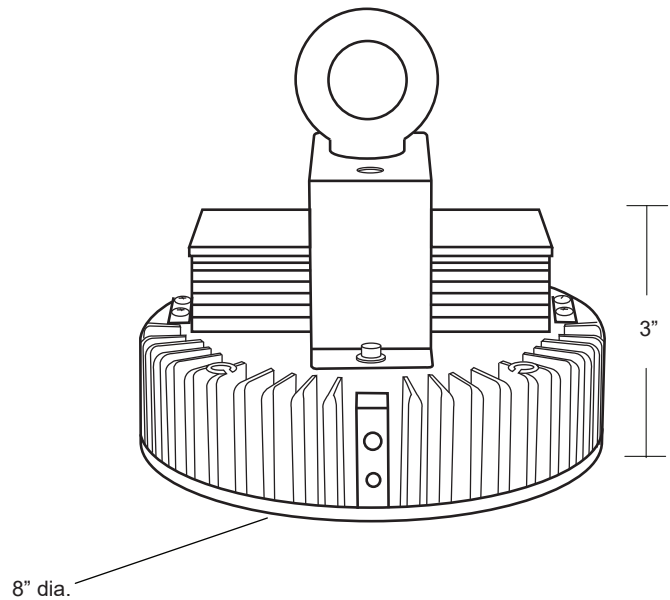

Specifications

MODEL:	CM - HB - 60	LAMPING:	Seoul LED
MATERIAL:	Cold Forged Aluminum	FINISHES:	SL - Silver WT - White
VOLTAGE:	100 - 277 VAC		BK - Black
WATTAGE:	60 Watts		

Ordering Logic:

MODEL	WATTAGE	OPTIONS	KELVIN	FINISH
CM - HB	60 - 60 Watts	0 - None 1 - Aluminum Reflector 60° 2 - Aluminum Reflector 120° 3 - Acrylic Cover	40 - 4000K 45 - 4500K 50 - 5000K	SL - Silver WT - White BK - Black

ORDERING EXAMPLE: CM - HB - 60 - 0 - 40 - BK

Excelsior Lighting, Inc.

PROJECT

TYPE