


Specification-grade landscape lighting, wet-location luminaire for path or wash lighting applications.

- Machined 6061-T6 copper-free aluminum. Aluminum components are anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes available.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Tempered frosted glass lens.
- Stems lengths of 6"- 36" available. Mount not included.
- High-temperature silicone O-ring seals are used to seal the cover against the body.
- Listed for wet location use.
- Warranty: 10 Years.

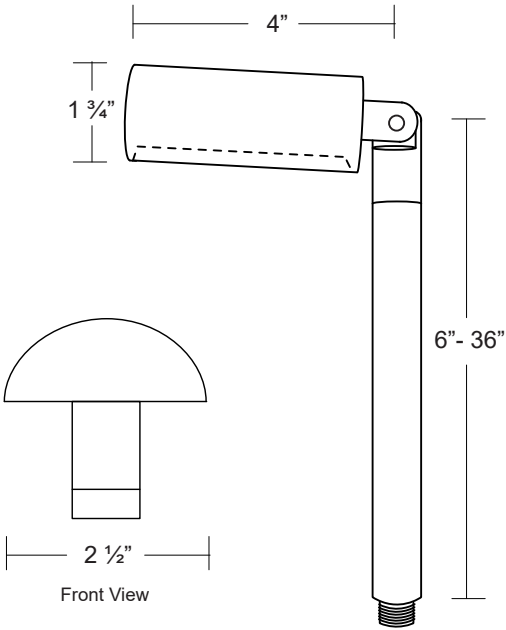

Specifications:

MODEL:	PL-17	LAMPING:	T4 Halogen, 35W Maximum (order separately) 5W LED (order separately)
MATERIAL:	6061-T6 Aluminum		
VOLTAGE:	12V		
WATTAGE:	35 Watt		
SOCKET:	GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.		

Ordering Logic:

MODEL	METAL	VERTICAL STEM		FINISH	
PL-17	A - Aluminum	6 - 6"	24 - 24"	BK - Black	BKT - Black Texture
		9 - 9"	30 - 30"	BZ - Bronze	BZT - Bronze Texture
		12 - 12"	36 - 36"	WT - White	SL - Silver
		18 - 18"		BG - Beige	

ORDERING EXAMPLE: PL - 17 - A - 12 - BZT

Excelsior Lighting, Inc.

PROJECT

TYPE