


- Hinged lockable cover and up to four 1/2" and 3/4" knockouts - bottom.
- 150W, 300W and 600W sizes.
- Circuit breaker for each 300W circuit.
- Multi-tap outputs of 12V thru 15V.
- 6 foot outdoor cord included.
- 120V input, 60 Hz. Dimmable.
- Stainless steel enclosure, NEMA 3R.
- For wall mount applications.
- UL and cUL listed for landscape lighting use.
- Timer and photocell integral.
- Operating times 1-9 hours.



150, 300 & 600 watts

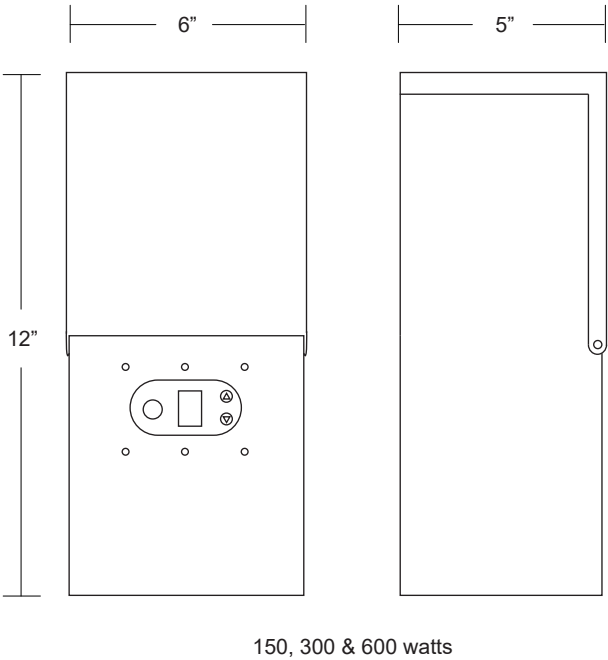

Ordering Logic:

MODEL	WATTAGE	VOLTAGE
TR - 5	150 - 150 Watts	120 - 120 Volts
	300 - 300 Watts	240 - 240 Volts
	600 - 600 Watts	

ORDERING EXAMPLE: TR - 5 - 300 - 120

Excelsior Lighting, Inc.

PROJECT

TYPE