


Specification-grade LED lighting, wet-location luminaire for uplighting or downlighting applications. Can be utilized for ground mounted or surface mounted installations.

- 20 Watts
- 2,150 Lumens
- 100-277 VAC
- LED 3030
- 4000K, 4500K or 5000K
- Cold forged Aluminum
- Stainless steel hardware
- Tempered clear glass lens
- Bracket mounting
- Wet location IP65
- ETL Certification
- Dimensions: 4 1/2" x 3 1/2" x 3 3/4"
- Warranty: 5 Years.

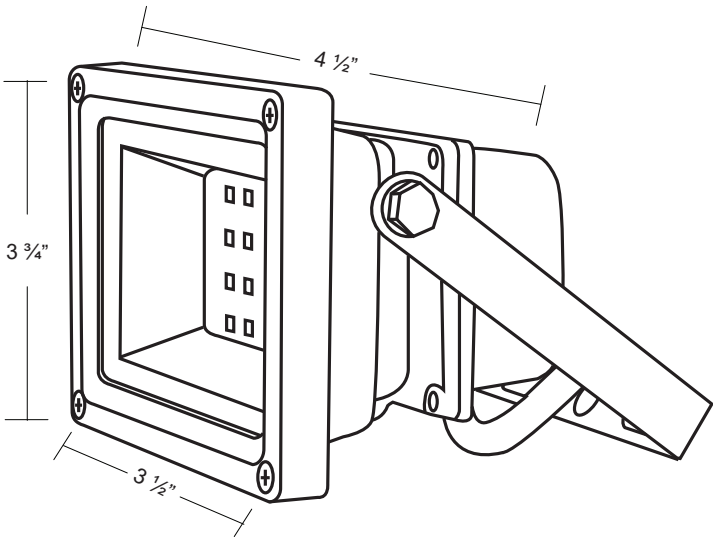

Specifications

|           |                      |           |             |            |
|-----------|----------------------|-----------|-------------|------------|
| MODEL:    | CM - FL1 - 20        | LAMPING:  | LED 3030    |            |
| MATERIAL: | Cold forged Aluminum | FINISHES: | BZ - Bronze | BK - Black |
| VOLTAGE:  | 100 - 277 VAC        |           | WT - White  |            |
| WATTAGE:  | 20 Watts             |           |             |            |

Ordering Logic:

| MODEL    | WATTAGE       | OPTIONS                     | KELVIN     | FINISH      |            |
|----------|---------------|-----------------------------|------------|-------------|------------|
| CM - FL1 | 20 - 20 Watts | 0 - None                    | 40 - 4000K | BZ - Bronze | BK - Black |
|          |               | 1 - Aluminum Reflector 60°  | 45 - 4500K | WT - White  |            |
|          |               | 2 - Aluminum Reflector 120° | 50 - 5000K |             |            |
|          |               | 3 - Acrylic Cover           |            |             |            |

ORDERING EXAMPLE: CM - FL1 - 20 - 0 - 40 - BZ

Excelsior Lighting, Inc.

PROJECT

TYPE