


Specification-grade wall wash landscape lighting, wet-location luminaire for wash lighting applications.

- High quality die-cast aluminum luminaire with wet location, waterproof housing.
- 9W-36W power consumption. External 24VDC power supply driver required.
- 0-10V dimming on 24W and 36W models.
- Three Kelvin: 3000K, 4000K, RGB, RGBW.
- IP 66 rated.
- 15°, 30°, 45° and 60° beam angles.
- Clear tempered glass lens, impact resistant.
- 1 foot cable supplied (in/out) Waterproof connectors.
- Listed for wet location use.
- Warranty: 3 Years.

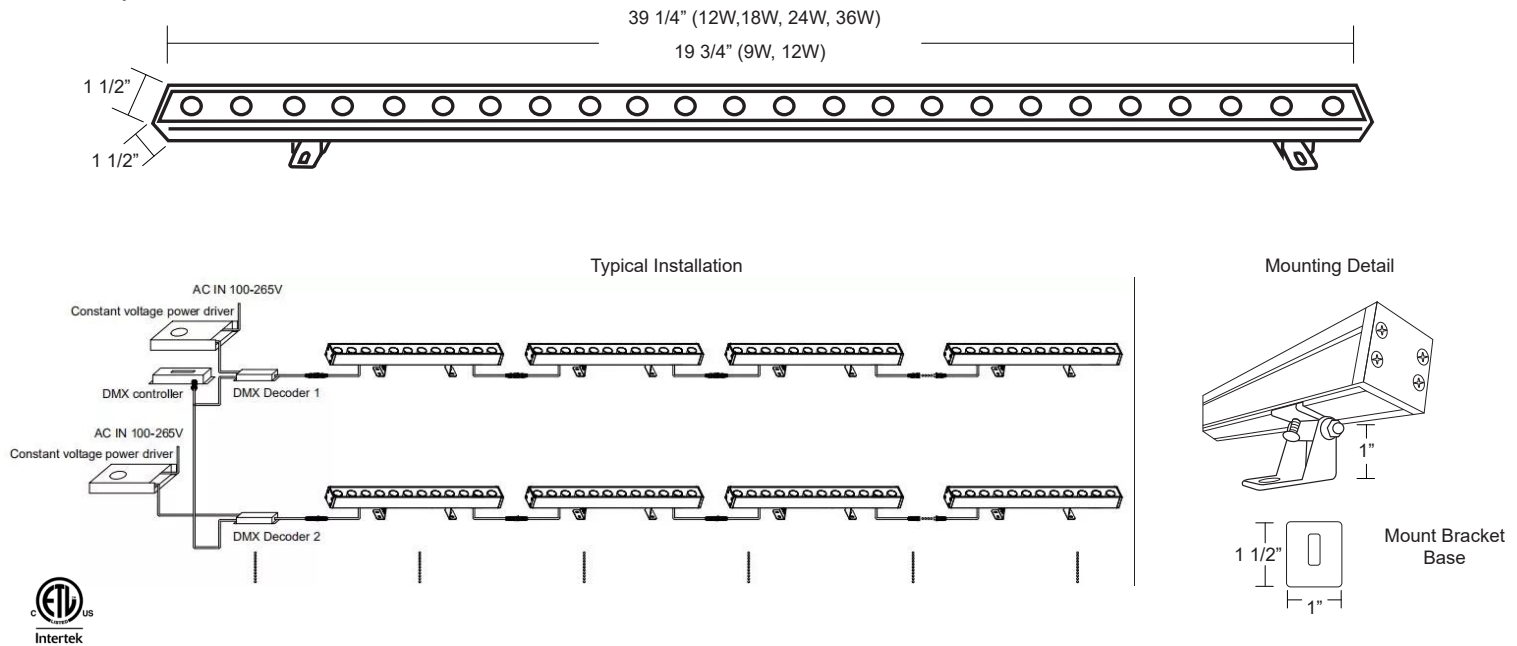

Specifications:

MODEL:	SI - 50L	LAMPING:	9 x 1 watt Osram LED
MATERIAL:	Powder coated aluminum		12 x 1 watt Osram LED
VOLTAGE:	24VDC		18 x 1 watt Osram LED
WATTAGE:	9W, 12W, 18W, 24W, 36W		24 x 1 watt Osram LED
			36 x 1 watt Osram LED

Ordering Logic:

MODEL	WATTAGE	KELVIN	BEAM
SI - 50L	9 - 9 watt (912 lm)	24 - 24 watt (2454 lm)	30 - 3000K
	12 - 12 watt (1230 lm)	36 - 36 watt (3676 lm)	15 - 15°
	18 - 18 watt (1882 lm)		45 - 45°
			30 - 30°
			60 - 60°
		R - RGB	
		RW - RGBW	

ORDERING EXAMPLE: SI - 50L - 9 - 30 - 45

Excelsior Lighting, Inc.

PROJECT

TYPE