


Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

- Machined aluminum with seven polyester powder coat finishes.
- Machined brass construction with two finishes available*.
- Available in Seven standard TGIC powder coat finishes and natural or dark bronze finishes.
- Remote transformer required.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Available in 12" or 20" height. Mount not included.
- Frosted, tempered glass lens.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Listed for wet location use.
- Warranty: Aluminum: 10 Years, Brass: 25 Years.

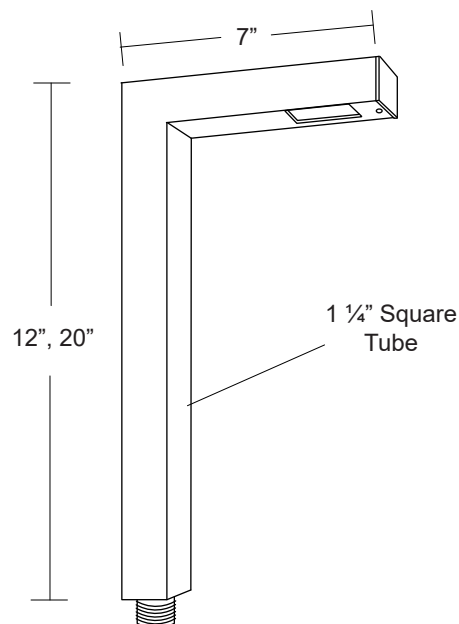

Specifications

| | | | |
|-----------|---|----------|--|
| MODEL: | PL-15 | LAMPING: | T4 Halogen, 35W Maximum (order separately) 5W LED (order separately) |
| MATERIAL: | Aluminum or Brass | | |
| VOLTAGE: | 12V | | |
| WATTAGE: | 35 Watt | | |
| SOCKET: | GY-6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads. | | |

Ordering Logic:

| MODEL | METAL | STEM LENGTH | | FINISH | |
|-------|---------------------------|-------------|----------|--|--|
| PL-15 | A - Aluminum B - Brass | 12 - 12" | 20 - 20" | BK - Black BZ - Bronze WT - White BG - Beige *NT - Natural | BKT - Black Texture BZT - Bronze Texture SL - Silver CA - Clear Anodized *DB - Dark Bronze |

ORDERING EXAMPLE: PL - 15 - B - 12 - NT

Excelsior Lighting, Inc.

PROJECT

TYPE