
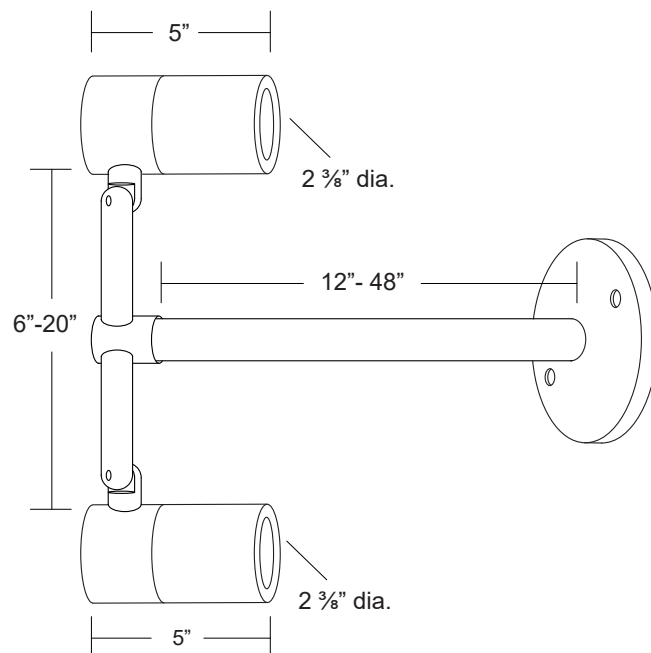


Specification-grade wet-location luminaire for sign lighting applications.

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Adjustable LED module (2x): 2W, 4W, 6W, 9W. ( 12W startup draw )
- CRI = 85
- Available in 2700K, 3000K.
- Remote transformer required.
- Stainless steel hardware.
- Flush lens cap holds 2 lens accessories
- Tempered clear glass glued in.
- Available stem lengths: 12", 18", 24", 30", 36", 42" or 48"
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.

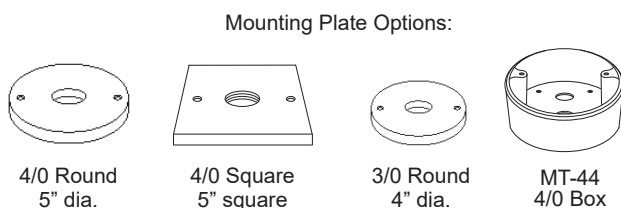

## Specifications

MODEL: SI-15L

MATERIAL: 6061-T6 Aluminum

VOLTAGE: 10.8-13.2VAC/DC

WATTAGE: 2W, 4W, 6W, 9W (X2)

LAMPING: 9W LED Module (X2) ( 12W startup draw )

| Wattage | 2700K    | 3000K    |
|---------|----------|----------|
| 2W      | 165 lms. | 190 lms. |
| 4W      | 345 lms. | 360 lms. |
| 6W      | 515 lms. | 530 lms. |
| 9W      | 720 lms. | 800 lms. |

## Ordering Logic:

| MODEL   | METAL        | MOUNTING PLATE | FIXTURE SPACING |          | STEM LENGTH |          | FINISH      |                      |
|---------|--------------|----------------|-----------------|----------|-------------|----------|-------------|----------------------|
| SI -15L | A - Aluminum | 1 - 4/0 Round  | 9 - 9"          | 13 - 13" | 12 - 12"    | 36 - 36" | BK - Black  | BKT - Black Texture  |
|         |              | 2 - 4/0 Square | 11 - 11"        | 19 - 19" | 18 - 18"    | 42 - 42" | BZ - Bronze | BZT - Bronze Texture |
|         |              | 3 - 3/0 Round  |                 |          | 24 - 24"    | 48 - 48" | WT - White  | SL - Silver          |
|         |              |                |                 |          | 30 - 30"    |          | BG - Beige  | CA - Clear Anodized  |

ORDERING EXAMPLE: SI - 15L - A - 1 - 9 - 24 - BK - 52/52\*


\*See page 2 to select module type to be installed

Excelsior Lighting, Inc.

PROJECT

TYPE

9W MULTI-LEVEL - 2W, 4W, 6W, 9W (165-800 Lumens)



- Equivalent to MR16 20W/35W/50W/75W Halogen (equivalent CBCP)
- Four light levels, 2700K or 3000K
- 10.8-13.2V AC/DC
- 12W startup draw
- Interchangeable lenses: 15°, 30°, 45°, 60°
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Compatible with low-voltage magnetic transformers
- L70=60,000 hours
- 5 Year warranty
- FCC Compliant
- RoHS Compliant
- Pb Free

| #  | Specifications      | Lumens  |
|----|---------------------|---------|
| 50 | 2W - 9W, 2700K, 15° | 165-720 |
| 51 | 2W - 9W, 2700K, 30° | 165-720 |
| 52 | 2W - 9W, 2700K, 45° | 165-720 |
| 60 | 2W - 9W, 2700K, 60° | 165-720 |
| 53 | 2W - 9W, 3000K, 15° | 190-800 |
| 54 | 2W - 9W, 3000K, 30° | 190-800 |
| 55 | 2W - 9W, 3000K, 45° | 190-800 |
| 61 | 2W - 9W, 3000K, 60° | 190-800 |

| Wattage | 2700K    | 3000K    |
|---------|----------|----------|
| 2W      | 165 lms. | 190 lms. |
| 4W      | 345 lms. | 360 lms. |
| 6W      | 515 lms. | 530 lms. |
| 9W      | 720 lms. | 800 lms. |

#### LENSES INCLUDED

15°



45°



30°



60°

