



Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.

- Copper and brass covers available in natural or dark bronze finishes or powder coat finishes.
- Adjustable LED Module: 2W, 4W, 6W, 9W, 12W (15W startup draw)
- Available in 2700K or 3000K.
- Field replaceable.
- Remote magnetic transformer required.
- Not compatible with electronic transformers.
- Stainless steel hardware.
- 6 feet of 18/2 low voltage cable supplied.
- Available in heights of 9", 12" or 18".
- Frosted acrylic lens.
- High-temperature silicone O-ring seals are used to seal the cap and body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.

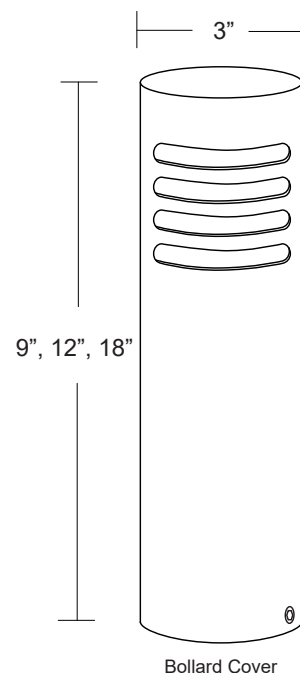

Mounting Base Options

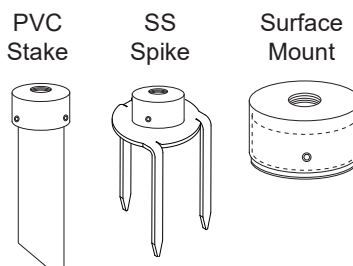

Specifications

MODEL:	PL-20L
MATERIAL:	Machined Aluminum, Copper & Brass Bollard Cover
VOLTAGE:	12VAC/DC
WATTAGE:	2W - 12W Adjustable
SOCKET:	GY 6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon ® coated leads.

LAMPING: 2W-12W Adjustable LED Module

Wattage	2700K	3000K
2W	240 lms.	230 lms.
4W	340 lms.	385 lms.
6W	580 lms.	670 lms.
9W	820 lms.	915 lms.
12W	960 lms.	1165 lms.

Ordering Logic:

MODEL	COVER	OPTICS	KELVIN	HEIGHT	MOUNTING BASE	FINISH
PL - 20L	A - Aluminum B - Brass C - Copper	1 - 180° 2 - 360°	27 - 2700K 30 - 3000K	9 - 9" 12 - 12" 18 - 18"	1 - PVC Stake 2 - SS Spike 3 - Surface Mount	BK - Black BZ - Bronze WT - White BG - Beige NT - Natural BKT - Black Texture BZT - Bronze Texture SL - Silver CA - Clear Anodized DB - Dark Bronze

ORDERING EXAMPLE: PL - 20L - B - 1 - 27 - 18 - 1 - NT - 52*


*See Module sheet to select module type to be installed

Excelsior Lighting, Inc.

PROJECT

TYPE

12W MULTI-LEVEL - 2W, 4W, 6W, 9W, 12W (210-1165 Lumens)



- True equivalent to MR16 20W/35W/50W Halogen (equivalent CBCP)
- 2700K or 3000K
- Equivalent to either 50W, 35W or 20W halogen light output levels
- 12VAC/DC
- G5.3 bi-pin base
- 15W startup draw
- Interchangeable lenses: 15°, 30°, 45°, 60°
- Superior Light Output and thermal performance compared to LED Replacement Lamps
- Compatible with low-voltage magnetic transformers
- L70=60,000 hours
- 3 Year warranty
- FCC Compliant
- RoHS Compliant
- Pb Free
- Field replaceable

#	Specifications	Lumens
50	2W - 12W, 2700K, 15°	210-960
51	2W - 12W, 2700K, 30°	210-960
52	2W - 12W, 2700K, 45°	210-960
60	2W - 12W, 2700K, 60°	210-960
53	2W - 12W, 3000K, 15°	230-1165
54	2W - 12W, 3000K, 30°	230-1165
55	2W - 12W, 3000K, 45°	230-1165
61	2W - 12W, 3000K, 60°	230-1165

Wattage	2700K	3000K
2W	210 lms.	230 lms.
4W	340 lms.	385 lms.
6W	580 lms.	670 lms.
9W	820 lms.	915 lms.
12W	960 lms.	1165 lms.



15° / 30° / 45° / 60°

Beam angle easily changed through replacing lens.



2W / 4W / 6W / 9W / 12W

External 5 positions switch to change the wattage manually.

15°



45°



30°



60°

