



Specification-grade landscape lighting, wet-location luminaire for up lighting or down lighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Remote transformer required.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- GY 6.35 bi pi socket
- Tempered clear glass lens.
- Flush lens cap holds 1 lens accessory.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Listed for wet location use.
- Warranty: 10 Years.


Mounting Plate Options:




4/0 Round  
5" dia.




3/0 Round  
4" dia.



Surface  
MT-11



Surface  
MT-21

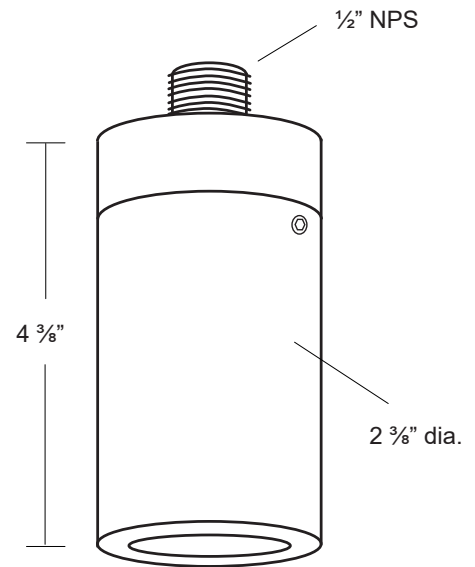

## Specifications

MODEL:	DL-10	LAMPING:	MR16 Halogen, 35W Maximum (order separately) 8W LED (order separately)	
MATERIAL:	6061-T6 Aluminum			
VOLTAGE:	12V			
WATTAGE:	35 Watt	FINISHES:	BK - Black BZ - Bronze WT - White BG - Beige	BKT - Black Texture BZT - Bronze Texture SL - Silver CA - Clear Anodized
SOCKET:	GY 6.35 Bi-pin porcelain socket rated 600V, 250°C 18 ga, Teflon® coated leads.			

## Ordering Logic:

MODEL	METAL	MOUNTING PLATE	STEM LENGTH		FINISH	
DL - 10	A - Aluminum	1 - 4/0 Round	0 - None	9 - 9"	BK - Black	BKT - Black Texture
		2 - 3/0 Round	3 - 3"	12 - 12"	BZ - Bronze	BZT - Bronze Texture
		3 - Surface MT-11	6 - 6"	18 - 18"	WT - White	SL - Silver
		4 - Surface MT-21			BG - Beige	CA - Clear Anodized

ORDERING EXAMPLE: DL - 10 - A - 1 - 0 - BK

Excelsior Lighting, Inc.

PROJECT

TYPE