


Specification-grade landscape lighting, wet-location luminaire for uplighting or downlighting applications. Can be utilized for ground mounted, tree mounted or surface mounted installations.

- 30 Watts.
- 3,283 Lumens.
- 100-277 VAC.
- Nichia LEF.
- 22°, 35°, 57° Beams.
- 3000K, 4000K, or 5000K.
- Die-cast aluminum.
- Stainless steel hardware.
- Tempered glass lens.
- 1/2" NPT Mounting.
- Wet location, IP65.
- UL Certification.
- Warranty: 5 Years.

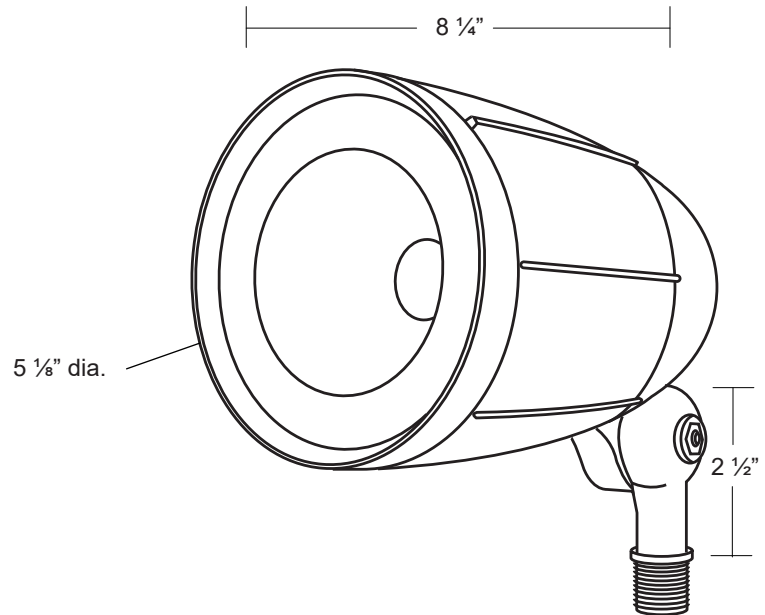

Specifications

MODEL: CM - BF - 30

LAMPING: Nichia LED

MATERIAL: Die Cast Aluminum

VOLTAGE: 100 - 277 VAC

WATTAGE: 30 Watt

Ordering Logic:

MODEL	WATTAGE	KELVIN	OPTION	BEAM	FINISH
CM - BF	30 - 30 watt	30 - 3000K	N - No Glare Shield	22 - 22°	BZ - Bronze
		40 - 4000K	G - Glare Shield	35 - 35°	WT - White
		50 - 5000K		57 - 57°	BK - Black

ORDERING EXAMPLE: CM - BF - 30 - 30 - G - 35 - BZ

Excelsior Lighting, Inc.

PROJECT

TYPE