



Specification-grade landscape lighting, wet-location luminaire for path or garden lighting applications.


- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Stainless steel hardware.
- Three interchangeable reflector optics included.
- Three cap styles from which to choose.
- Ground mount included.
- Stems lengths of 12"- 42" available.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Listed for wet location use.
- Warranty: 10 Years.



90° Flush



90° Regress

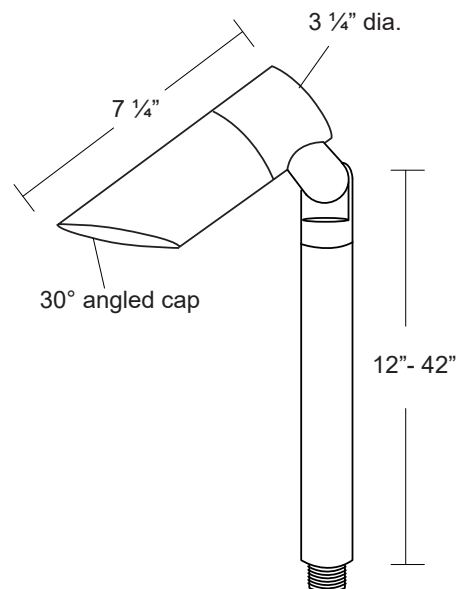

Specifications:

MODEL: PL-40L

MATERIAL: 6061-T6 Aluminum

VOLTAGE: 120V-277V

WATTAGE: 8W, 16W, 31W

Interchangeable optics supplied with luminaire.

OPTICS: SP - 20° Spot
FL - 42° Flood
WFL - 60° Wide Flood

KELVIN: 2700, 3000, 3500, 4000

FINISHES: BK - Black BKT - Black Texture
BZ - Bronze BZT - Bronze Texture
WT - White SL - Silver
BG - Beige CA - Clear Anodized

Ordering Logic:

MODEL	CAP STYLE	STEM LENGTH		MOUNT	FINISH	
PL - 40L	1 - 90° Flush	12 - 12"	30 - 30"	MT48 - Ground Stake	BK - Black	BKT - Black Texture
	2 - 90° Regress	18 - 18"	36 - 36"		BZ - Bronze	BZT - Bronze Texture
	3 - 30° Angle	24 - 24"	42 - 42"		WT - White	SL - Silver
					BG - Beige	CA - Clear Anodized

ORDERING EXAMPLE: PL - 40L - 1 - 12 - MT48 - BK - 643*

*See specification sheet to select lamp type to be installed

Excelsior Lighting, Inc.

PROJECT

TYPE

Xicato XTM LED Modules with Corrected Cold Phosphor Technology

- Flux packages from 700lm to 2000lm.
- CCT range from 2700K to 4000K.
- Integrated DC driver electronics.
- Efficacy up to 99 lm/W.
- Very tight color consistency, within 1x2 MacAdam ellipses initially and 3 MacAdam ellipses after 50,000 hours.
- A verifiable 50,000 hour/7 year operational warranty.
- Warranty: 5 Years



XTM SERIES



19MM

C.O.B LED MODULE OPTIONS


	XTM MODULE	COLOR
700 LUMENS	640	2700K
	641	3000K
	642	3500K
	643	4000K
1300 LUMENS	644	2700K
	645	3000K
	646	3500K
	647	4000K
2000 LUMENS	648	2700K
	649	3000K
	650	3500K
	651	4000K



42° Flood



60° Wide Flood




20° Spot

INTERCHANGEABLE OPTICS

Machined aluminum cap with PVC stake for ground-mounting. Designed for mounting single luminaire for ground mount installation of LED driver.

- Machined aluminum cap.
- 120-277 VAC driver
- Dimmable driver included for use with standard incandescent dimmers. 10-100% range: 8W, 16W or 31W (specify)
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- 3X 1/2" Slip conduit connectors.
- PVC stake lengths: 12" or 18".
- Listed for wet location use.
- Warranty: Mounting - 10 years
Driver - 5 years

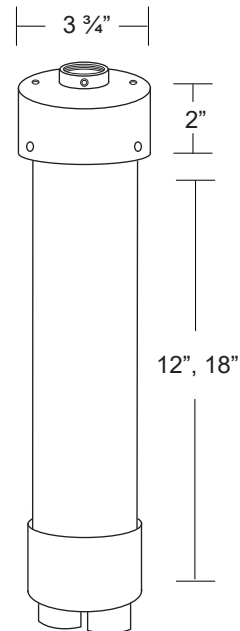

Specifications

MODEL:	MT-48	VOLTAGE:	120-277 VAC Input	
MOUNTING:	1/2" NPS	FINISHES:	BK - Black BZ - Bronze WT - White BG - Beige	BKT - Black Texture BZT - Bronze Texture SL - Silver CA - Clear Anodized

Ordering Logic:

MODEL	METAL	STAKE LENGTH	DIMMABLE DRIVER	CAP FINISH	
MT - 48	A - Aluminum	12 - 12" 18 - 18"	8 - 8W 16 - 16W 31 - 31W	BK - Black BZ - Bronze WT - White BG - Beige	BKT - Black Texture BZT - Bronze Texture SL - Silver CA - Clear Anodized

ORDERING EXAMPLE: MT - 48 - A - 12 - 8 - BZ

Excelsior Lighting, Inc.

PROJECT

TYPE