


Specification-grade LED lighting, wet-location luminaire downlighting applications. Can be utilized for surface mounted installations.

- 40 Watts
- 5,412 Lumens
- 100-277 VAC
- Cree 3030
- 4000K, 4500K or 5000K
- Die-Cast Aluminum
- Stainless steel hardware
- Optic lens
- Surface Mounting
- Wet location IP65
- UL Certification
- Dimensions: 9 1/2" x 9 1/2" x 3 1/4"
- Warranty: 6 Years

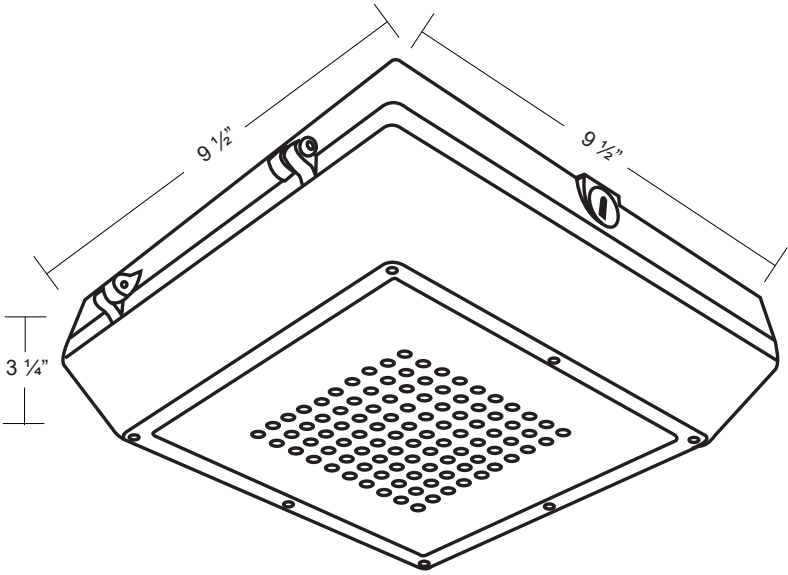

Specifications

MODEL:	CM - CP - 40	LAMPING:	Cree 3030 LED	
MATERIAL:	Die-Cast Aluminum	FINISHES:	BZ - Bronze	BK - Black
VOLTAGE:	100 - 277 VAC		WT - White	
WATTAGE:	40 Watts			

Ordering Logic:

MODEL	WATTAGE	KELVIN	FINISH	
CM - CP	40 - 40 Watts	40 - 4000K	BZ - Bronze	BK - Black
		45 - 4500K	WT - White	
		50 - 5000K		

ORDERING EXAMPLE: CM - CP - 40 - 40 - BZ

Excelsior Lighting, Inc.

PROJECT

TYPE