


Specification-grade direct burial landscape lighting, wet-location luminaire for uplighting applications.

- Machined 6061-T6 copper-free aluminum. Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Seven standard TGIC powder coat finishes and clear anodized finish available.
- Remote transformer required.
- GY 6.35 bi pin porcelain socket.
- IP 67 rated.
- Two glare shield heights available.
- Tempered glass lens.
- Holds 3 lens accessories.
- Pour collar option available.
- 6 feet of 16/2 low voltage cable supplied.
- Listed for wet location use.
- Warranty: 10 Years.

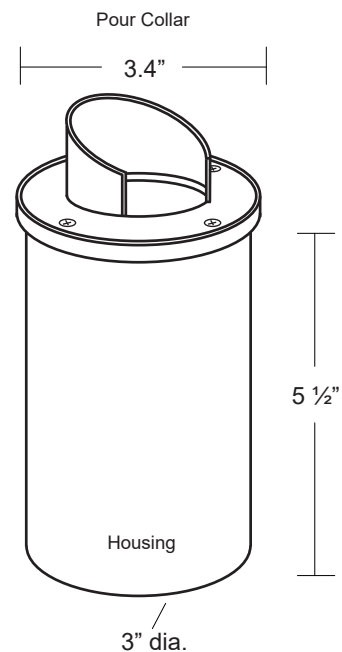

## Specifications:

|           |                                                                                   |           |                                                                              |                                                                                   |
|-----------|-----------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| MODEL:    | IN-2                                                                              | LAMPING:  | MR16 Halogen,<br>35W Maximum (order separately)<br>8W LED (order separately) |                                                                                   |
| MATERIAL: | 6061-T6 Aluminum                                                                  |           |                                                                              |                                                                                   |
| VOLTAGE:  | 12V                                                                               |           |                                                                              |                                                                                   |
| WATTAGE:  | 35 Watt                                                                           | FINISHES: | BK - Black<br>BZ - Bronze<br>WT - White<br>BG - Beige                        | BKT - Black Texture<br>BZT - Bronze Texture<br>SL - Silver<br>CA - Clear Anodized |
| SOCKET:   | GY-6.35 Bi-pin porcelain socket rated 600V,<br>250°C 18 ga, Teflon® coated leads. |           |                                                                              |                                                                                   |

## Ordering Logic:

| MODEL  | METAL        | CUTOFF SIZE                         | POUR COLLAR                                        | FINISH                                                |                                                                                   |
|--------|--------------|-------------------------------------|----------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------------------------------|
| IN - 2 | A - Aluminum | S - Short (1")<br>T - Tall (1 1/2") | 0 - None (standard)<br>PC - Pour Collar (optional) | BK - Black<br>BZ - Bronze<br>WT - White<br>BG - Beige | BKT - Black Texture<br>BZT - Bronze Texture<br>SL - Silver<br>CA - Clear Anodized |

ORDERING EXAMPLE: IN - 2 - A - T - 0 - BK

Excelsior Lighting, Inc.

PROJECT

TYPE